




Nuestra experiencia pesa...

## CELDA DE CARGA UNIPUNTO - MODELO ILB -

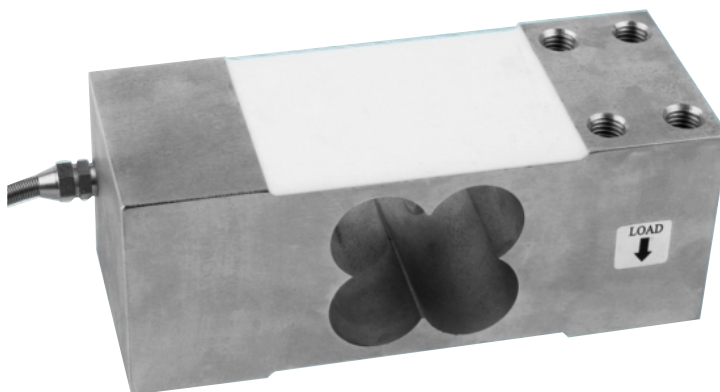

### APLICACIONES:

Balanzas de plataforma  
Balanzas Industriales

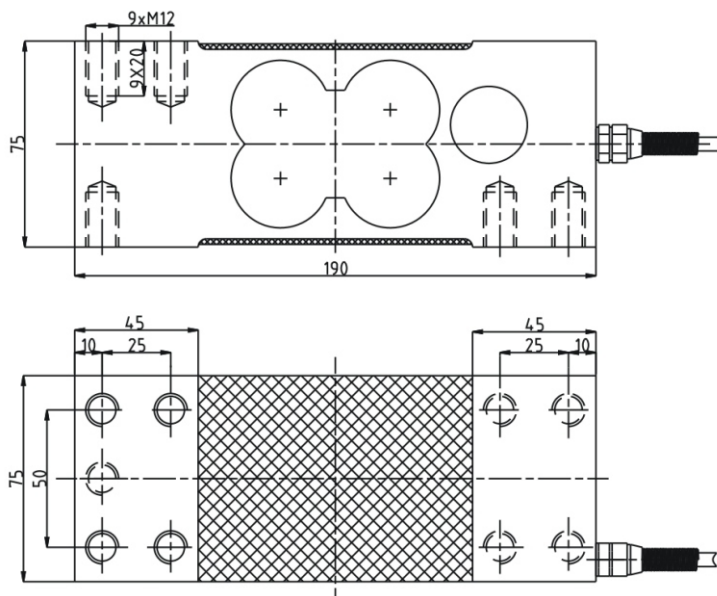

### TECHNICAL PARAMETER | 4Wires:Exc+(红,Red);Exc-(黑,Black);Sig+(绿,Green);Sig-(白,White)

|                        |                                 |                                    |                 |
|------------------------|---------------------------------|------------------------------------|-----------------|
| 额定载荷 Rated load        | 50,100,150,200,300,500kg, 1t,2t | 绝缘电阻 Insulation resistance         | ≥5000 MΩ        |
| 精度等级 Accuracy class    | 0.03                            | 额定温度 Nominal Temp Range            | -10~+40℃        |
| 灵敏度 Sensitivity        | 2.0 ± 0.2mV/V                   | 工作温度范围 Service Temp Range          | -30~+70℃        |
| 线性误差 Non-linearity     | ± 0.03%F.S                      | 安全负载 Safe load limit               | 150%F.S         |
| 滞后误差 Hysteresis error  | ± 0.03%F.S                      | 破坏负载 Breaking load                 | 200%F.S         |
| 蠕变 (30分钟) Creep(30min) | ± 0.02%F.S                      | 额定激励电压 Nominal of range excitation | 10~12 V DC      |
| 零点温度影响 TC ZERO         | ± 0.02%F.S/10℃                  | 密封等级 Protection Class              | IP65            |
| 灵敏度温度影响 TC SPAN        | ± 0.02%F.S/10℃                  | 材料 Material                        | 合金钢 Alloy steel |
| 输入阻抗 Input resistance  | 400 ± 20 Ω                      | 电缆 Cable                           | Length=3m       |
| 输出阻抗 Output resistance | 352 ± 5 Ω                       | 最大秤台尺寸 Max.platform size           | 600x800mm       |