

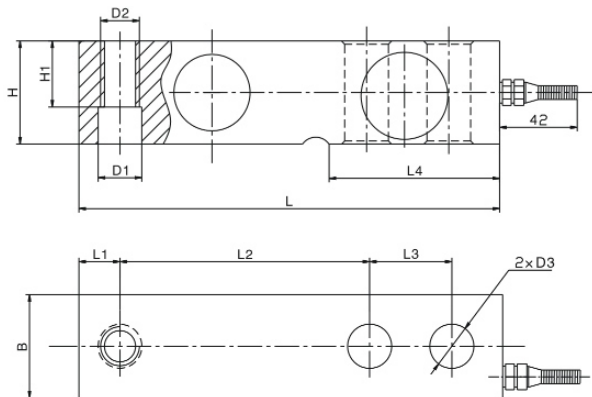


Nuestra experiencia pesa...

CELDA DE CARGA TIPO VIGA - MODELO SQBY -

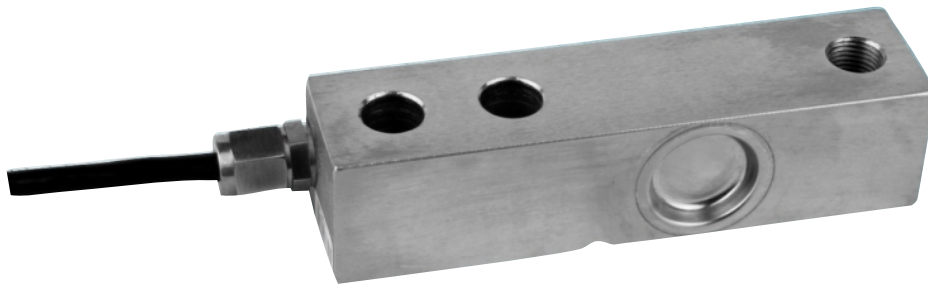

Rated load (klb)	L	L1	L2	L3	L4	H/B	H1	D1	D2	D3
1, 1.5, 2, 2.5, 4	130	12.7	76.2	25.4	53.5	31.8	15.7	Φ13.5	1/2-20UNF-2B	Φ13
5, 7.5, 10	171.5	19	95.3	38.1	72.5	38.1	26	Φ20	3/4-16UNF-2B	Φ20
15, 20	225.5	25.3	124	50.8	102	50.8	25.4	Φ27	1-14UNS	Φ27

配料秤、平面台秤
 blending scale, platform scale

TECHNICAL PARAMETER

额定载荷 Rated load	1, 1.5, 2, 2.5, 4, 5, 7.5, 10, 15, 20klb	绝缘电阻 Insulation resistance	≥ 5000 MΩ
精度等级 Accuracy class	III S 5000	额定温度 Nominal Temp Range	-10~+40°C
灵敏度 Sensitivity	3.0 ± 0.003mV/V	工作温度范围 Service Temp Range	-30~+70°C
线性误差 Non-linearity	± 0.03%F.S	安全负载 Safe load limit	150%F.S
滞后误差 Hysteresis error	± 0.03%F.S	破坏负载 Breaking load	200%F.S
蠕变 (30分钟) Creep(30min)	± 0.02%F.S	额定激励电压 Nominal of range excitation	10~12 V DC
零点温度影响 TC ZERO	± 0.02%F.S/10°C	密封等级 PROTECTION CLASS	IP67
灵敏度温度影响 TC SPAN	± 0.02%F.S/10°C	材料 Material	合金钢 Alloy Steel
输入阻抗 Input resistance	400 ± 20 Ω	电缆 Cable	Length: 1.5m/3m 1:1 (1~5klb) 6m(7.5~20klb)
输出阻抗 Output resistance	352 ± 3 Ω		