

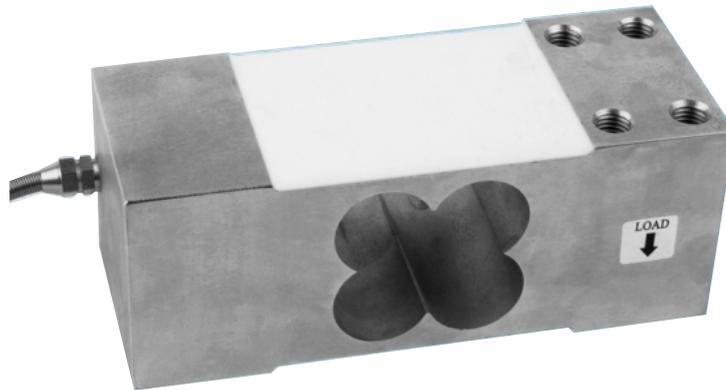


CELDA DE CARGA UNIPUNTO - MODELO ILB -

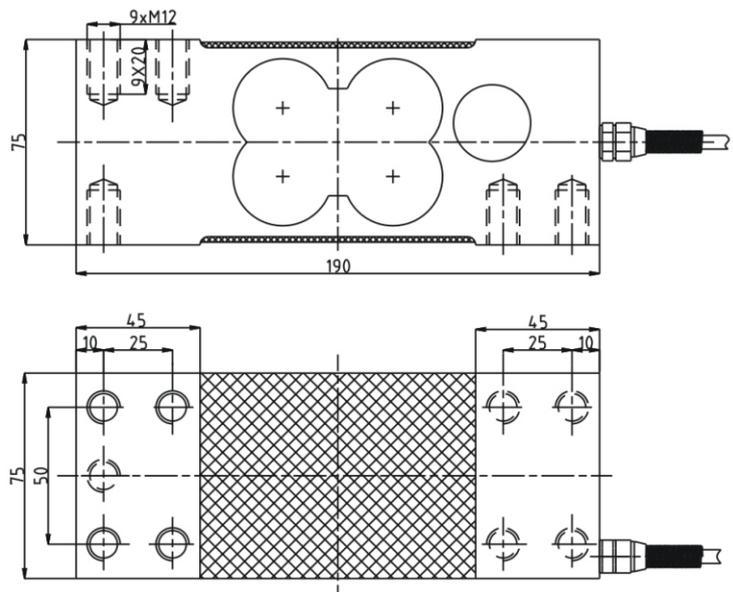

APLICACIONES:

Balanzas de plataforma
Balanzas Industriales



TECHNICAL PARAMETER

4Wires:Exc+(红,Red);Exc-(黑,Black);Sig+(绿,Green);Sig-(白,White)

额定载荷 Rated load	50,100,150,200,300, 500kg, 1t,2t	绝缘电阻 Insulation resistance	≥5000 MΩ
精度等级 Accuracy class	0.03	额定温度 Nominal Temp Range	-10~+40℃
灵敏度 Sensitivity	2.0 ± 0.2mV/V	工作温度范围 Service Temp Range	-30~+70℃
线性误差 Non-linearity	± 0.03%F.S	安全负载 Safe load limit	150%F.S
滞后误差 Hysteresis error	± 0.03%F.S	破坏负载 Breaking load	200%F.S
蠕变 (30分钟) Creep(30min)	± 0.02%F.S	额定激励电压 Nominal of range excitation	10~12 V DC
零点温度影响 TC ZERO	± 0.02%F.S/10℃	密封等级 Protection Class	IP65
灵敏度温度影响 TC SPAN	± 0.02%F.S/10℃	材料 Material	合金钢 Alloy steel
输入阻抗 Input resistance	400 ± 20Ω	电缆 Cable	Length=3m
输出阻抗 Output resistance	352 ± 5Ω	最大秤台尺寸 Max.platform size	600x800mm