
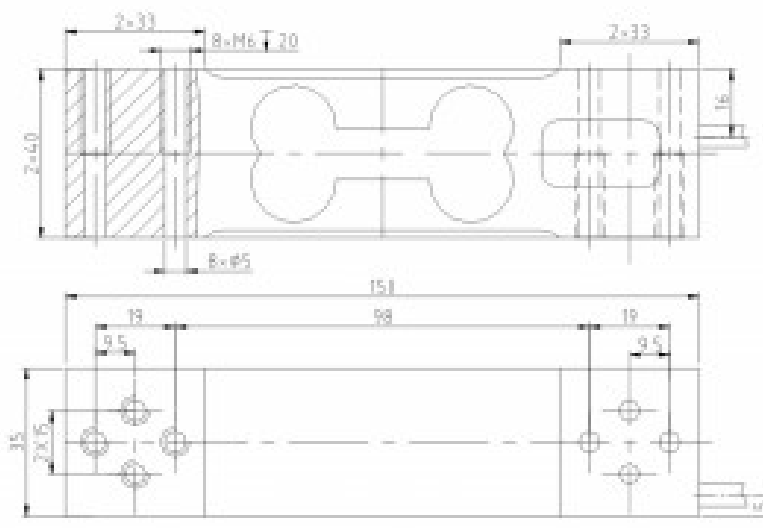


Nuestra experiencia pesa...

CELDA DE CARGA UNIPUNTO - MODELO UDB -



TECHNICAL PARAMETER

额定载荷 Rated capacities(Emax)	15,30,50,100,200kg	温度补偿范围 Temperature range, compensated	-10℃~+40℃
灵敏度 Sensitivity	2.0±0.2mV/V	工作温度范围 Temperature range, operating	-20℃~+50℃
精度等级 Accuracy class	C3	安全过载 Maximum safe overload	150%Emax
蠕变(30分钟)Creep error (30min)	±166ppm	极限过载 Ultimate overload	300%Emax
零点平衡 Zero balance	±3%Emax	推荐激励电压 Excitation, recommended	10V DC
零点温度影响 TC ZERO	±17.5ppm/℃	最大激励电压 Excitation, maximum	15V DC
输出温度影响 TC SPAN	+20℃~+40℃, ±17.5ppm/℃ -10℃~+20℃, ±11.67ppm/℃	防封等级 Protection class	IP65
		材质 Construction	铝合金Aluminium
输入阻抗 Input resistance	404 ±15Ω	电缆 Cable	2m@ Φ5mm
输出阻抗 Output resistance	350 ±3Ω	推荐安装力矩 Installation torque, recommended	10N·m
绝缘电阻 Insulation resistance	≥2000 MΩ (50V DC)		
推荐安装台面 Max. platform size	300×400mm(15~50kg); 400×500mm(100~200kg)		