
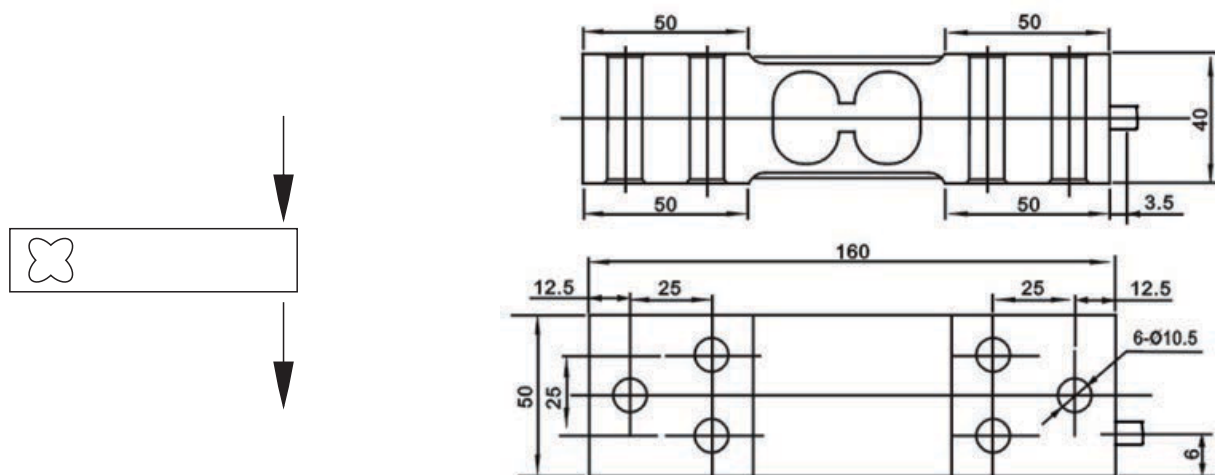


Nuestra experiencia pesa...

## CELDA DE CARGA UNIPUNTO - MODELO UDE -

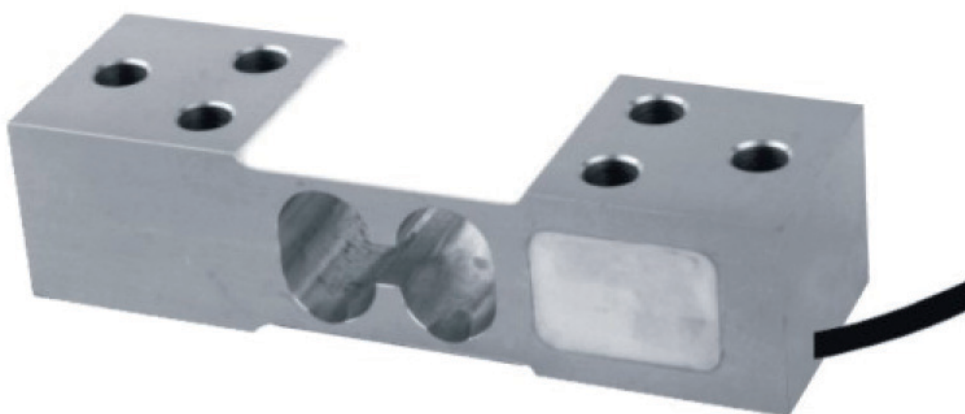

All kinds of platform scales, bench scale

### TECHNICAL PARAMETER

OAP version 4Wires:Exc+(Blue);Exc-(Black);Sig+(White);Sig-(Red)

|                        |                           |                                 |              |
|------------------------|---------------------------|---------------------------------|--------------|
| Rated capacities(Emax) | 30,50,75,100,150,200kg    | Temperature range, compensated  | -10°C~+40°C  |
| Sensitivity            | 2.0±0.2mV/V               | Temperature range, operating    | -20°C~+50°C  |
| Accuracy class         | C3                        | Maximum safe overload           | 150%Emax     |
| Creep error (30min)    | ±166ppm                   | Ultimate overload               | 300%Emax     |
| Zero balance           | ±3%Emax                   | Excitation,recommended          | 10V DC       |
| TC ZERO                | ±17.5ppm/°C               | Excitation,maximum              | 15V DC       |
| TC SPAN                | +20°C~+40°C, ±17.5ppm/°C  | Protection class                | IP65         |
|                        | -10°C~+20°C, ±11.67ppm/°C | Construction                    | 铝合金Aluminium |
| Input resistance       | 404±15Ω                   | Cable                           | 2m@φ5mm      |
| Output resistance      | 350±3Ω                    | Installation torque,recommended | 25N·m        |
| Insulation resistance  | ≥2000MΩ (50V DC)          |                                 |              |
| Max platform size      | 350×400mm                 |                                 |              |