
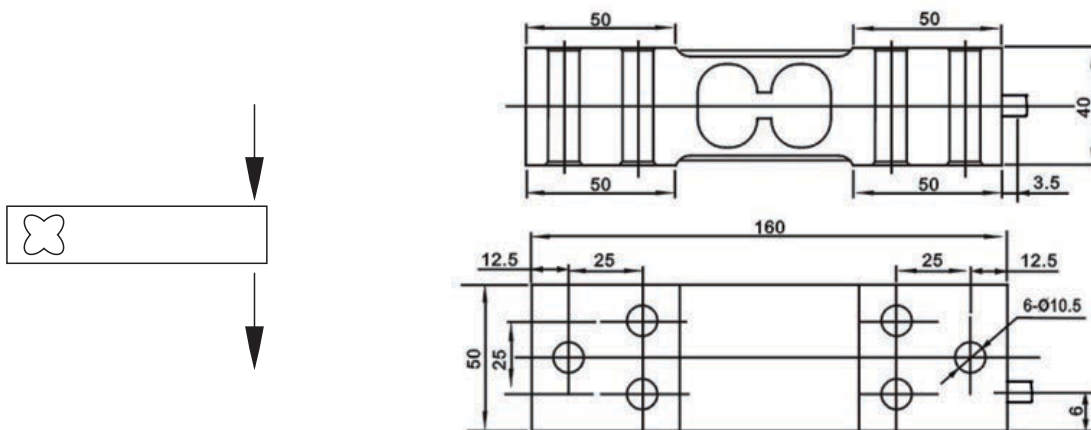


CELDA DE CARGA UNIPUNTO - MODELO UDE -

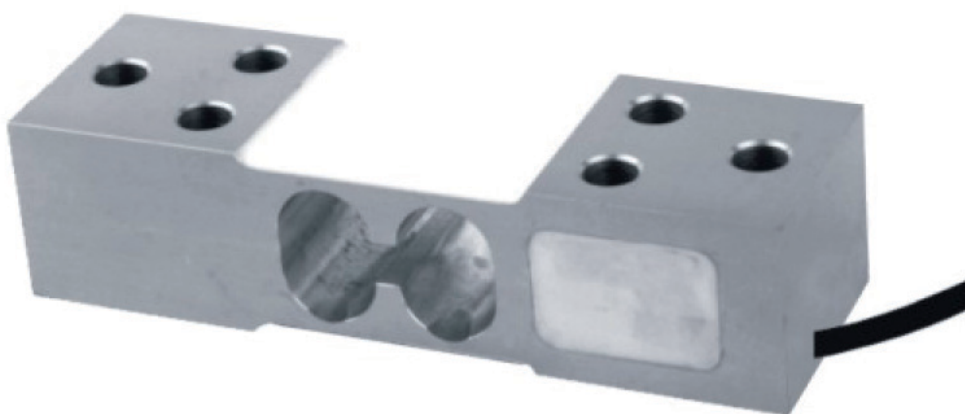

All kinds of platform scales, bench scale

TECHNICAL PARAMETER | OAP version 4Wires:Exc+(Blue);Exc-(Black);Sig+(White);Sig-(Red)

Rated capacities(Emax)	30,50,75,100,150,200kg	Temperature range, compensated	-10°C~+40°C
Sensitivity	2.0±0.2mV/V	Temperature range, operating	-20°C~+50°C
Accuracy class	C3	Maximum safe overload	150%Emax
Creep error (30min)	±166ppm	Ultimate overload	300%Emax
Zero balance	±3%Emax	Excitation,recommended	10V DC
TC ZERO	±17.5ppm/°C	Excitation,maximum	15V DC
TC SPAN	+20°C~+40°C, ±17.5ppm/°C	Protection class	IP65
	-10°C~+20°C, ±11.67ppm/°C	Construction	铝合金Aluminium
Input resistance	404±15Ω	Cable	2m@φ5mm
Output resistance	350±3Ω	Installation torque,recommended	25N·m
Insulation resistance	≥2000 MΩ (50V DC)		
Max platform size	350×400mm		