



Nuestra experiencia pesa...

CELDA DE CARGA TIPO VIGA - MODELO SQBY -

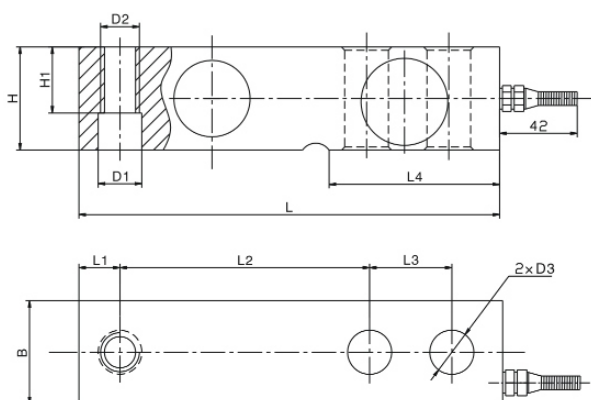

Rated load (kllb)	L	L1	L2	L3	L4	H/B	H1	D1	D2	D3
1, 1.5, 2, 2.5, 4	130	12.7	76.2	25.4	53.5	31.8	15.7	Φ13.5	1/2-20UNF-2B	Φ13
5, 7.5, 10	171.5	19	95.3	38.1	72.5	38.1	26	Φ20	3/4-16UNF-2B	Φ20
15, 20	225.5	25.3	124	50.8	102	50.8	25.4	Φ27	1-14UNS	Φ27

配料秤、平台秤
blending scale, platform scale

TECHNICAL PARAMETER

4Wires:Exc+(红,Red);Exc-(黑,Black);Sig+(绿,Green);Sig-(白,White)

额定载荷Rated load	1、1.5、2、2.5、4、5、7.5、10、15、20klb	绝缘电阻Insulation resistance	≥5000 MΩ
精度等级 Accuracy class	IIIL S 5000	额定温度 Nominal Temp Range	-10~+40℃
灵敏度Sensitivity	3.0 ± 0.003mV/V	工作温度范围Service Temp Range	-30~+70℃
线性误差 Non-linearity	± 0.03%F.S	安全负载Safe load limit	150%F.S
滞后误差 Hysteresis error	± 0.03%F.S	破坏负载Breaking load	200%F.S
蠕变 (30分钟) Creep(30min)	± 0.02%F.S	额定激励电压Nominal of range excitation	10~12 V DC
零点温度影响TC ZERO	± 0.02%F.S/10℃	密封等级PROTECTION CLASS	IP67
灵敏度温度影响TC SPAN	± 0.02%F.S/10℃	材料Material	合金钢 Alloy Steel
输入阻抗Input resistance	400 ± 20Ω	电缆Cable	Length:1.5m/3m 1:1 (1~5klb)
输出阻抗Output resistance	352 ± 3Ω		6m(7.5~20klb)